
COMMENTS:
1. EV COMMENTS IN RED.
2. REF. DETAIL C2/A401.
3. PROVIDE ABU POST BASES, SIMILAR TO GRIDS G.9, 1 AND 2. PROVIDE 5/8" DIA. THREADED ROD ANCHORS FOR ATTACHMENT TO POST BASES TO CONCRETE, EMBEDDED 2 1/2" MIN. WITH RED HEAD A7+ EPOXY, TYP.

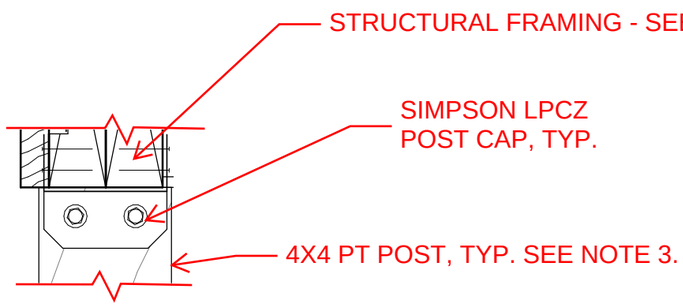

C2 TYPICAL EXTERIOR STAIR RAILING SECTION
Scale: 3" = 1'-0"

banwell ARCHITECTS
THE CARRIAGE HOUSE
6 SOUTH PARK STREET
LEBANON, NH 03766
T: 603 448 3778

ENGINEERING VENTURES PC
208 Flynn Avenue, Suite 2A, Burlington, VT 05401 | (802) 863-6225
85 Mechanic Street, Suite E2-3, Lebanon, NH 03766 | (603) 442-9333
414 Union Street, Schenectady, NY 12305 | (518) 205-9141
www.engineeringventures.com

PROJECT:
CORNISH LIBRARY & COMMUNITY CENTER
226 NH-120
CORNISH FLAT, NH 03746

SKS-005
DATE: 12/03/25
EV PROJECT #: 23264